



Split Muro Inverter

4MXW 9.000 - 24.000 BTU/h





El nuevo modelo Split Muro Alta Eficiencia de TRANE con su tecnología inverter es una solución total, que representa para su usuario un menor consumo de energía además de confort, proporcionando enfriamiento y calefacción para clientes que exigen un alto poder de desempeño y eficiencia.

Nuevo Diseño:

En un tono plateado el nuevo modelo Split Muro Alta Eficiencia de TRANE entrega un diseño moderno para ambientes visualmente armoniosos.

Rotary DC Inverter Compressor:

El diseño del compresor reduce la fricción durante el funcionamiento. Su rotación es más suave con menos vibración, a la vez que evita la fuga de gas refrigerante durante la compresión.



Ingersoll Rand (NYSE:IR) advances the quality of life by creating comfortable, sustainable and efficient environments. Our people and our family of brands—including Club Car®, Ingersoll Rand®, Thermo King® and Trane®—work together to enhance the quality and comfort of air in homes and buildings; transport and protect food and perishables; and increase industrial productivity and efficiency. We are a \$14 billion global business committed to a world of sustainable progress and enduring results. For more information, visit www.ingersollrand.com.




trane.com ingersollrand.com

We are committed to using environmentally conscious print practices

©2018 Ingersoll Rand IR000000

Model Type		4MXW1109AB000AA 4TXK1109ABP00AA	4MXW1112AB000AA 4TXK1112ABP00AA	4MXW1118AB000AA 4TXK1118ABP00AA	4MXW1124AB000AA 4TXK1124ABP00AA
Rated cooling capacity	Btu/h	9,000 (3.410~11.430)	12,000 (3.410~12.625)	18,000 (5.118~19.450)	22,000 (5.118~24.000)
Rated heating capacity	Btu/h	9,000 (3.410~11.260)	12,000 (3.410~12.795)	18,500 (5.118~22.180)	22,000 (5.118~25.590)
Indoor noise level at cooling	dB(A)	38	38	44	50
Power supply		220-240V~/50Hz/1P			
Rated current	Cooling	A	3.9 (1.5~4.9)	5.3 (1.4~6.3)	8.2 (1.6~10.8)
	Heating	A	3.8 (1.4~4.8)	5.2 (1.4~6.2)	8.0 (1.6~12.0)
Rated input	Cooling	W	852 (320~1080)	1142 (320~1375)	1715 (200~2150)
	Heating	W	643 (320~1055)	1135 (320~1360)	1683 (230~2350)
Max current	A	5.1/5.0	6.3/6.2	10.8/12	13.5/17.5
Max input	W	1107/1096	1375/1360	2150/2350	2800/3200
Refrigerant/Charge	Gram	R410A/560g	R410A/610g	R410A/1350g	R410A/2000 g
Compressor	Type	Rotary			
Indoor fan motor output	W	20	14	25	45
Outdoor fan motor output	W	25	33	52	100
Connecting Pipe	Gas	Inches	3/8"	3/8"	1/2"
	Liquid	Inches	1/4"	1/4"	1/4"
Connecting Wiring	Size x Core number	4×1.0mm2	4×1.0mm2	4×1.5mm2	4×0.75mm2
Net dimensions	Indoor	mm	777×250×205	777×250×205	910×292×205
	Outdoor	mm	700×552×256	700×552×256	780×605×290
Net weight (W x H x D)	Indoor	kg	8	8	10
	Outdoor	kg	25	26	37

* Cada equipo completo incluye kit de 4 metros de tubería.

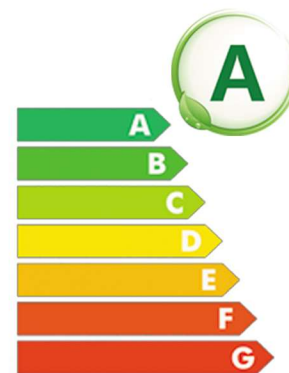

Principales Funciones:

- Sleep
- Temporizador 24H
- Reinicio automático
- Doble drenaje lateral
- Operación de emergencia



Turbo: Permite enfriar o calentar el cuarto rapidamente operando la unidad a la mayor velocidad de funcionamiento.



Eco: Al activar esta función en modo frío incrementa la temperatura 2 °C respecto a la seleccionada. En modo calor, reduce la temperatura 2 °C respecto a la seleccionada.



I feel: Permite detectar la temperatura real del cuarto con la unidad de control remoto para maximizar el confort desde cualquier parte de la habitación.



TRANE de CHILE
Dealer Channel

